


Product specification Euroslide patio doors

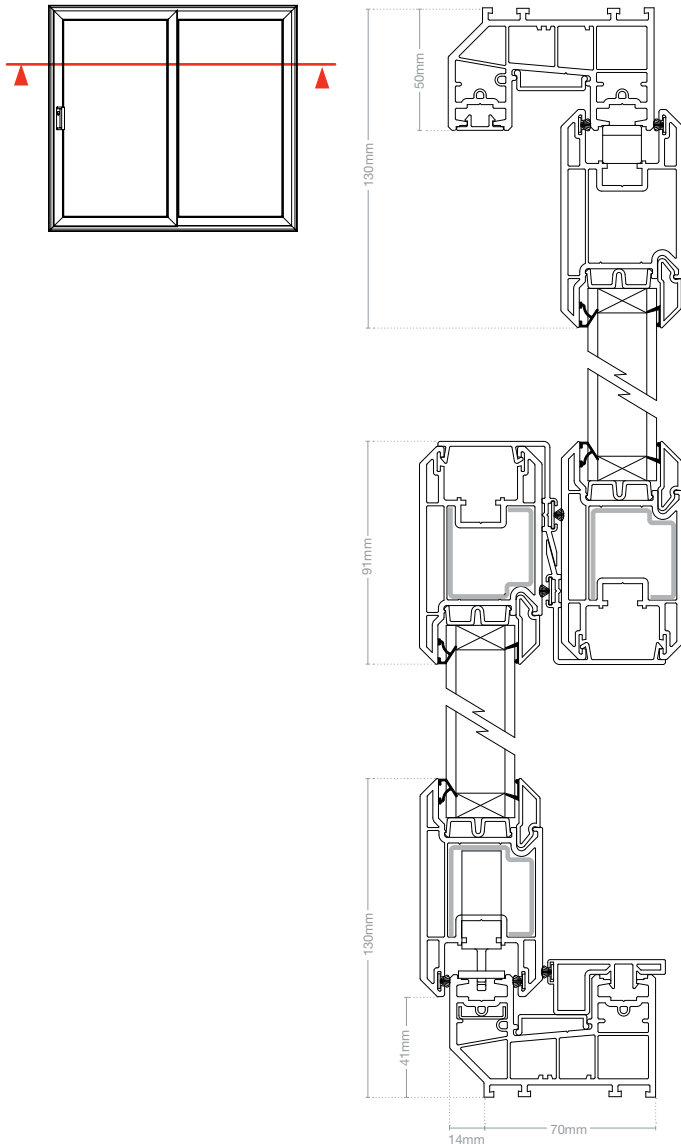

EUROSLIDE DOUBLE GLAZED SPECIFICATION

Profiles

– Eurocell **euroslide** system

Reinforcements

– Steel

Cill options

Standard: 85mm (130mm*), 150mm (195mm*) and 180mm (225mm*)

* When used with cill extender

Accreditations

– BS 6375-1

Style



Chamfered



Ovolo (beads only)

Colour options

Standard colours



Extended lead-time colours



Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.

Min /max sizes

If the patio doors to be manufactured are outside these sizes, please consult Eurocell's technical department.

| System | Width (mm) | Height (mm) |
|--------|------------------------|------------------------|
| 2 pane | Max: 3000 Min: 1650 | Max: 2455 Min: 1950 |
| 3 pane | Max: 4500 Min: 2480 | Max: 2455 Min: 1950 |
| 4 pane | Max: 5930 Min: 3220 | Max: 2455 Min: 1950 |

Thermal performance

| System | External pane | Internal pane | Gas fill | Spacer bar | U Value |
|------------------|---------------|--------------------------|----------|------------------------|---------|
| euroslide | Float | Pilkington K | Argon | Non-metallic warm edge | 1.7 |
| euroslide | Float | AGC Planibel A | Air | Non-metallic warm edge | 1.8 |
| euroslide | Float | AGC Planibel A | Argon | Metallic spacer | 1.7 |
| euroslide | Float | AGC Planibel A | Argon | Non-metallic warm edge | 1.6 |
| euroslide | Float | SG Planitherm Total Plus | Air | Non-metallic warm edge | 1.7 |
| euroslide | Float | SG Planitherm Total Plus | Argon | Metallic spacer | 1.6 |
| euroslide | Float | SG Planitherm Total Plus | Argon | Non-metallic warm edge | 1.5 |

Note: The calculations left should be used for guideline purposes only. Other options also available. To have **euroslide** performance simulated, please contact Eurocell's technical department.