


# Product specification Eurologik French doors

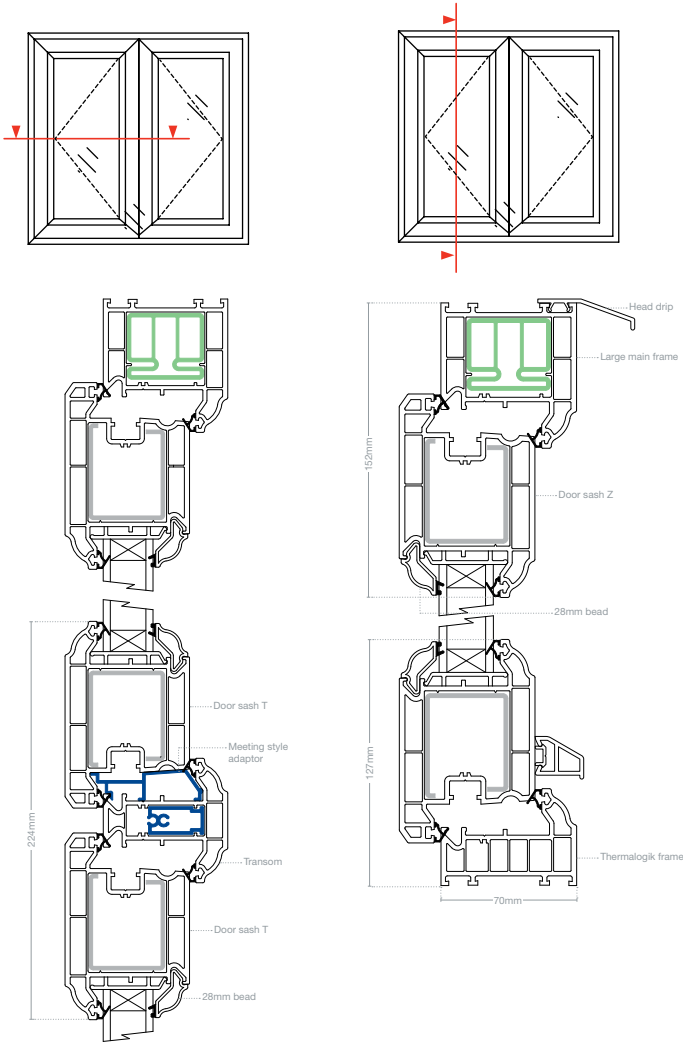

## EUROLOGIK FRENCH DOORS DOUBLE GLAZED INWARD OPENING, INTERNALLY GLAZED

### Profiles

- Eurocell **eurologik** 70mm system
- Large outer with slim threshold

### Reinforcements

- PVC-U Thermal Inserts
- Steel and Aluminium

### Cill options

**Standard:** 85mm (130mm\*), 150mm (195mm\*) and 180mm (225mm\*)

\* When used with cill extender

### Accreditations

- Eurocell **eurologik** profile system is BBA certified
- BS EN 12608, PAS 23 /24

### Style




Ovolo




Chamfered

### Thermal performance



### Colour options

#### Standard colours



#### Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.


\* White Ash and Irish Oak available in Ovolo styles only. Anthracite Grey and Slate Grey available in Chamfered only

### Min / max sizes

If the doors are to be manufactured are outside these sizes, please consult Eurocell's technical department.

System	Width (mm)	Height (mm)
French doors (outer to outer)	Max: 2000 Min: 1200	Max: 2300 Min: 1800

### Low threshold available

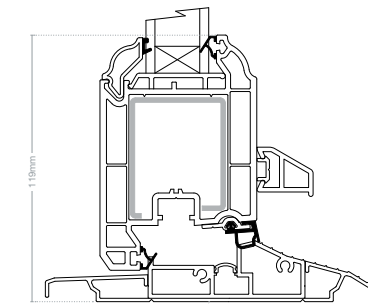

Low threshold assembly  
EWS 7545A and EWS 7546A